


# MSR-2Y(St)YKYRY Pimf - Timf

1/1

PE insulated, individual &amp; overall screened, lead protected and armoured, PVC sheathed instrumentation cable

## Construction

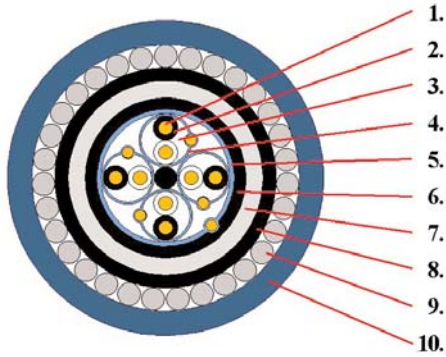

1. Conductor: bare annealed copper, stranded, cl. 2 acc. IEC 60228
2. Insulation: PE
3. Cabling elements: pairs or triples  
colour identification : pairs: BLACK/WHITE, each core numbered  
triples: BLACK/WHITE/RED, each core numbered
4. Individual screening: laminated Alu/PET tape (9µm Alu/12µm PET) in contact with a tinned copper drain wire 0,5 mm<sup>2</sup> (7x0,30mm)  
Cabling elements assembled in concentric layers
5. Overall screening: laminated Alu/PET tape (9µm Alu/12µm PET) in contact with a tinned copper drain wire 0,5 mm<sup>2</sup> (7x0,30mm)
6. First inner sheath: flame-retardant PVC
7. Metallic sheath (humidity barrier): lead alloy, type "E"
8. Second inner sheath: flame-retardant PVC
9. Armoring: one layer of galvanized steel wires
10. Outer sheath: flame-retardant PVC  
Outer sheath color: black or blue or according to customer specification  
Outer sheath marking: EUPEN MSR-2Y(St)YKYRY Pimf 4x2x1,0mm<sup>2</sup>  
300V + year + meter-marking  
or according to customer specification

## Electrical Properties acc. to EN 50288-7 (valid for single- and multi pair/triple types)

Voltage rating (V)	300 V				500 V			
	0,5	0,75	1,0	1,5	0,75	1,0	1,5	2,5
Conductor cross-section (mm <sup>2</sup> )	0,5	0,75	1,0	1,5	0,75	1,0	1,5	2,5
Conductor resistance @ 20°C (Ω/km)	≤36,7	≤25,0	≤18,5	≤12,3	≤25,0	≤18,5	≤12,3	≤7,56
Mutual capacitance * (nF/km)	≤115	≤115	≤115	≤115	≤115	≤115	≤115	≤115
L/R ratio * (µH/Ω)	<25	<25	<25	<40	<25	<25	<40	<60
Test voltage core/core (V <sub>ac</sub> )	1000				2000			
Test voltage core/screen (V <sub>ac</sub> )	1000				2000			
Insulation resistance @ 20°C (MΩ*km)	>5000				>5000			

\* valid for pair cables

## Laying conditions

Operating temperature	-30°C to +70°C
Laying temperature	-5°C to +50°C
Min. bending radius	15 x outer diameter
Oil resistance	ICEA S-82-552

## Fire behaviour

Fire propagation	IEC 60332-1 (IEC 60332-3 Cat. A or Cat.C on request)
------------------	--

## Application

Transmission of analog and digital signals for indoor and outdoor applications. Suitable for strong mechanical and chemical requirements, especially in petrochemical environment.