


# RMC 12-CH

## PRODUCT DESCRIPTION

### RMC 12-CH-HLFR

Reference suffix <sup>(1)</sup> :-HLFR

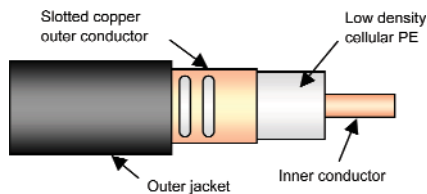

#### Fire behaviour

- Halogen free and flame retardant outer sheath
- Low corrosive gas emission acc. to IEC 60754-2
- Flame retardant acc. to IEC 60332-1 and IEC 60332-3 cat. C
- Low smoke emission acc. to IEC 61034

Slots in the copper outer conductor allow a controlled portion of the internal RF energy to be radiated into the surrounding environment. Conversely, a signal transmitted near the cable will couple into the slots and be carried along the cable length.

## FEATURES and BENEFITS

- Low Fading at short Aerial to Cable distance
- Robust Cable
- Main Applications: WLAN controlled Transportation Systems
- Optimised for WLAN applications in the 5.15 - 5.35 GHz and 5.47 - 5.85 GHz bands

## TECHNICAL FEATURES

• Size		1/2"
• Previous Model Number		N.A.
• Frequency Range	GHz	5000 - 6000
• Recommended for Frequency	MHz	5150 - 5350 and 5470 - 5850
• Cable Type		RMC (Radiated Mode Cable)
• Jacket		HLFR (Halogen Free Low Smoke Flame Retardant)
• Slot Design		Groups of Slots at short intervals
• Impedance	$\Omega$	50 +/- 3
• Velocity Ratio	%	88
• Capacitance	pF/m	76
• Inner Conductor dc Resistance	$\Omega/1000\text{ m}$ ( $\Omega/1000\text{ ft}$ )	1.48 (0.45)
• Outer Conductor dc Resistance	$\Omega/1000\text{ m}$ ( $\Omega/1000\text{ ft}$ )	2.8 (0.85)
• Inner Conductor Material		Copper clad aluminium wire
• Dielectric Material		Cellular polyethylene
• Outer Conductor Material		Overlapping copper foil, with slot groups, bonded to the jacket



# TECHNICAL DATA SHEET

## Radiating Cables

Kabelwerk

**EUPEN** AG

Rev.: 03/2008-10-14

**cable**

2/2

# RMC 12-CH

## TECHNICAL FEATURES (continued)

• Diameter Inner Conductor	mm (in)	4.8 (0.19)	
• Diameter Dielectric	mm (in)	12.4 (0.49)	
• Diameter over Jacket	mm (in)	15.5 (0.61)	
• Minimum Bending Radius, Single Bend	mm (in)	200 (7.87)	
• Cable Weight	kg/m (lb/ft)	0.232 (0.16) HLF	
• Tensile Strength	daN (lb)	110 (243)	
• Indication of Slot Alignment		embossed line 180° opposite	
• Storage Temperature	°C (°F)	-70 to +85 (-94 to +185)	
• Installation Temperature	°C (°F)	-25 to +60 (-13 to +140)	
• Operation Temperature	°C (°F)	-40 to +85 (-40 to +185)	
• Longitudinal Attenuation between 5.15 and 5.85 GHz			
	Configurations	Longitudinal Attenuation	
		5.15 GHz      5.85 GHz	
		dB/100 m (dB/100 ft)	
	• RC at 10 cm from a concrete floor	22.5 (6.86)      24 (7.32)	
	• RC at 15 mm from a metal surface	24.2 (7.38)      27 (8.23)	
	• RC directly against a metal surface	25 (7.62)      27 (8.23)	
• Coupling Loss and Peak to peak variations at 5.20 and 5.70 GHz (radial antenna orientation)			
	Antenna to RC distance	Coupling Loss C50%	Peak to peak variations
		5.20 GHz      5.70 GHz	
	cm	dB	dB
	2	36      35	16      10
	5	39      38	7      6
	10	42      40	6      6
	20	45      44	5      5
	50	49      47	4      5
• Resonant Frequencies	MHz	415, 1246, 2077, 2907, 3738, 4568, 5399, 6230	
• Clamp Spacing Recommended / Maximum	m (ft)	0.5 (1.64) / 1.20 (3.90)	
• Distance to Wall Recommended / Minimum	mm (in)	N.A.	

<sup>1)</sup> Must be specified in case of order - standard PE jacket available on request.

<sup>2)</sup> Measured in tunnel according to **IEC 61196-4 - Ground Level Method**.

Distance = 2m. C50 & (C95) are the average coupling losses with 50% (95%) probability calculated in accordance with the standard.

The above stated values are nominal values and subject to manufacturing tolerance.

As with any radiating cable, the performance in building or tunnel may deviate from figures measured according to the IEC 61196-4 standard.

Coupling loss measurements taken in accordance with IEC 61196-4 - Free Space Method are available on request