




HDPE - Underground cable ducting pipes for buried cables

according to

NBN EN61386-24; DIN16961

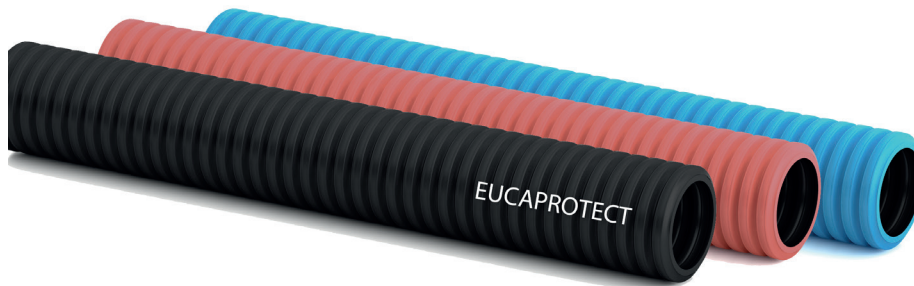

DN	Outside diameter in mm	Inside diameter in mm	Bending radius at 23°C in m.	Weight in kg/m
40	40	30	0,35	0,115
50	50	40	0,35	0,168
63	63	50	0,35	0,217
75	75	60	0,35	0,320
90	90	74	0,40	0,400
110	110	93	0,40	0,570
125	125	105	0,50	0,650
160	160	137	0,65	0,920
200	201	172	1,00	1,450

Provisional puller wire :

Maximum pulling force 200N

Materiel :

PE-halogen free

Connection type :

PE sleeve type SD (sand-tight)

Roll length :

25 and 50 m

Colour :

Black, red or blue - other colours on request (for example green, yellow)

All information given is indicative only and not binding and can be subject to change without notice.