




HDPE - Underground cable ducting pipes for buried cables

according to

NBN EN61386-24; DIN16961

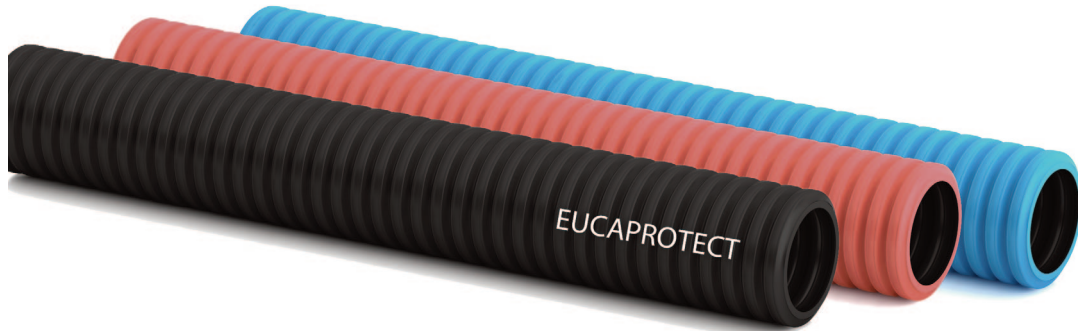

DN	Outside diameter in mm	Inside diameter in mm	Bending radius in m.	Weight in kg/m
40	40	32	0,35	0,134
50	50	40	0,35	0,188
63	64	52	0,35	0,240
75	76	62	0,35	0,304
90	91	75	0,35	0,440
110	111	93	0,50	0,540
125	126	107	0,50	0,712
160	161	138	0,75	0,980
200	200	176	1,00	1,450

Provisional puller wire :	Maximum pulling force 200N
Materiel :	PE-halogen free
Connection type :	PE sleeve type SD (sand-tight)
Roll length :	25 and 50 m
Colour :	Black, red or blue - other colours on request (for example green, yellow)

All information given is indicative only and not binding and can be subject to change without notice.