



INSTALLATION INSTRUCTION


50 Ohm CONNECTORS

Kabelwerk **EUPEN** AG

E1031 Rev.10/2024-03-19

cable

1/2" X (1/2" HIFLEX) - right angle connectors

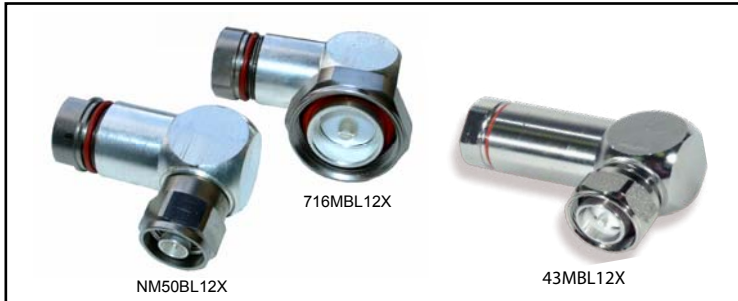

1/2"X	SPTC50BL12X

	NM	7/16M	4.3-10M
	19 mm & 23 mm	19 mm & 23 mm & 32 mm	19 mm & 23 mm



PREPARATION TOOL METHOD

- Strip the cable jacket.
- Strip the braided shield and inner conductors. Part number: SPTC50BL12X.
- Trim the conductors to 11 mm (0.429") and 12 mm (0.468").
- Strip the conductors with 3M F 04/013 abrasive.
- Apply Vaseline to the conductors.
- Insert the conductors into the connector. A 7 mm (0.27") gap is shown. A 'click' sound is heard.
- Tighten the connector.
- Do not over-tighten (indicated by a red X).
- Tighten to 27 Nm (20 ft-lb).
- Final view of the connector.

(D) Verarbeitung nur durch eine Elektrofachkraft. Es besteht die Gefahr eines elektrischen Schlagess!
 (F) Installation uniquement par une personne qualifiée en électricité. Il y a un risque de choc électrique!
 (NL) Installatie alleen door een vakman voor elektriciteit. Er is gevaar van elektrische schok!
 (GB) Processing only by a qualified electrician. There is a risk of electric shock!

Preparation drawing: 1:1

For any questions please contact KABELWERK EUPEN AG / for US Customer service call 1-800-419-5100

NOTICE:
KABELWERK EUPEN AG disclaims any liability or responsibility for the results of improper or unsafe installation practices.

AVIS:
KABELWERK EUPEN AG décline toute responsabilité en cas de non respect de ces instructions.

WAARSCHUWING:
KABELWERK EUPEN AG wijst elke verantwoordelijkheid van de hand in geval van het niet opvolgen van deze aanbevelingen.

BEMERKUNG:
KABELWERK EUPEN AG lehnt jede Verantwortung bei Nichtbeachtung dieser Instruktionen ab.

AVISO:
KABELWERK EUPEN AG rehusa todas las responsabilidades en caso de no respetar las instrucciones.

